



## DESIGN DUO S SPA

Teléfono: +56 22 2473722 / +56 9 64457688

Encuétranos en nuestros sitios web [www.daluce.cl](http://www.daluce.cl) / [www.acko.cl](http://www.acko.cl) / [www.perfilesled.cl](http://www.perfilesled.cl)

Conozca nuestras marcas

ARKOSLIGHT®

SORAA

Acko

Vista

## PANEL LED BIG BANG




### PRODUCTO

Modelo	BIG BANG
Marca	ACKO
Código	-
Colores	Negro
Categoría	Lámparas Suspendidas

### INFORMACIÓN TÉCNICA

Fuente	60W
Lúmenes	4800
Eficacia	80
Ángulo del haz de luz	100
Temperatura color	3000K
CRI	80
Voltaje	220-240V
Dimeable	RF DIM (incluido)
Vida útil	30.000
Índice de protección	20
Aplicación	Interior
Dimensiones	ø800x12.5mm
Material	Aluminio 6063
Método de instalación	Suspendido

### DIMENSIONES

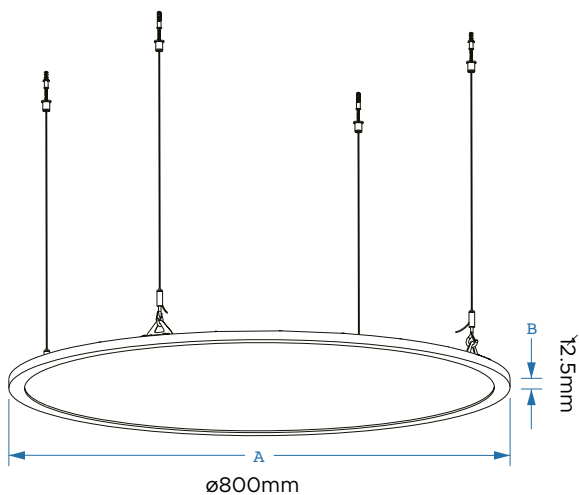



## DESIGN DUO S SPA

Teléfono: +56 22 2473722 / +56 9 64457688

Encuétranos en nuestros sitios web [www.daluce.cl](http://www.daluce.cl) / [www.acko.cl](http://www.acko.cl) / [www.perfilesled.cl](http://www.perfilesled.cl)

Conozca nuestras marcas

ARKOSLIGHT®

SORAA

Acko

Vista

## PANEL BIG BANG - RF DIMMING

### Introduction of Multifunction Remote Controller & Simplified Remote Controller:

Power:AAA battery×2

Communication Protocol:RF-2.4G

Effective Distance:20M(Without Obstacle)

Number of controllable lamps:1 controller can control 99 groups of lamps, and no limit to the number of lamps in one group.

ID of Lamp:ID of lamps could be 1 to 99

Multifunction:ON /OFF, Dimming and Color-temp adjusting,timing ON /OFF, 2 scenes recall,auto dimming,night light.

Copy the ID of Remote Controller:Every remote controller has its ID number.One controller can copy and use the ID number of another controller to control the same lamp, and recover its initial ID number.



### Operating method:

Steps of Setting ID number of lamps:

①Turn OFF the lamp by switch for 3 Seconds, then turn on lamp, finish step②,③ within 10 Seconds

②Press 1 or 2 numbers on the number keys of remote controller, than press "ID" key

③Repeat step ② again in case of mistake, then the lamp will flash 1 time.

④Turn off the lamp by switch within 10 seconds, then finish setting.

Control the lamps:

The function of the keys: as the picture on the right.

Control the single group: press the ID number of the lamp you want to control and then press one functional key(on/off, color temp, brightness).

All-control Model: press "●" key to control all groups.

TIMING ON/OFF:

Press the ID number of the lamp you want to set, press "ID" key.

SET:Press the number key 1-99, press "⏰" timing ON key or "⏸" timing OFF key, then finish setting. Timing units is 10minutes.

Cancel:Press"0"key, then "⏰" timing ON key or "⏸" timing OFF key to cancel timing mode.

COPY THE ID OF CONTROLLER:

Press"ID" key of one controller and"●" key of another controller at the same time, keep 6 seconds, the indicator will flash 3 times, then finish setting.

Recovery:Press the "ID" key and "●" key of the controller

which the ID has been copied for 6 seconds, the indicator will flash 3 times.

NIGHT LIGHT MODE:

Press"★"key when the lamp is turned off by the controller to enter the night light mode.

CIRCLE MODE:

Press the ID of the lamp, then press"⏸" (left, right, up, down) to enter the circle mode.

SCENE MODE:The system can save two scenes : "A" and "B"

Save:

①Adjust the light as your preference.

②Press the ID number of the lamp.

③Press"ID" key and then press"Ⓐ" or "Ⓑ", the lamp will flash 1 time, then the scene will be saved.

Recall:

①Press the ID number of the lamp.

②Press"Ⓐ" or "Ⓑ", the lamp will enter the scene you preset.